


ACTIVE JI



- Automatic self-priming centrifugal pump
- Pump body in stainless steel
- Liquid temperature: from -10°C to +35°C for domestic use
from -10°C to +40°C for other use
- Maximum ambient temperature: +40°C
- Maximum operating pressure: 8 bar (800 kPa)
- Protection level: IP44 (IP55 on the terminal board)
- Insulation class: F

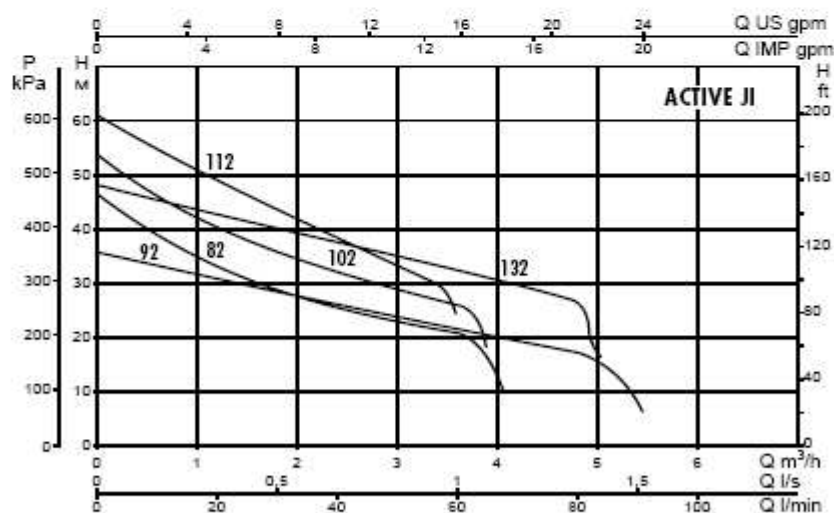

MODEL	VOLTAGE 50 Hz	P1 MAX W	P2 NOMINAL		In A	CAPACITOR	
			kW	HP		µF	Vc
ACTIVE JI 82 M	1x220-240V ~	850	0,6	0,8	3,8	12,5	450
ACTIVE JI 102 M	1x220-240V ~	1130	0,75	1	5,1	16	450
ACTIVE JI 112 M	1x220-240V ~	1400	1	1,36	6,2	25	450
ACTIVE JI 92 M	1x220-240V ~	940	0,75	1	4,2	14	450
ACTIVE JI 132 M	1x220-240V ~	1490	1	1,36	6,6	25	450