

AQUAJET - AQUAJET-INOX


AUTOMATIC SELF-PRIMING PRESSURE UNITS



Automatic water lifting units, suitable for domestic use, small installations for civil, agricultural, industrial use, washing and hobby applications.

The unit is equipped with a JET or JETINOX type self-priming electropump, membrane vessel, pressure switch for automatic operation, pressure gauge, fitting kit between pump and motor, all pre-assembled.

Tank: horizontal, 20 litre capacity type, inner butyl membrane, complete with stands at the bottom and brackets for fixing the pump to the top.

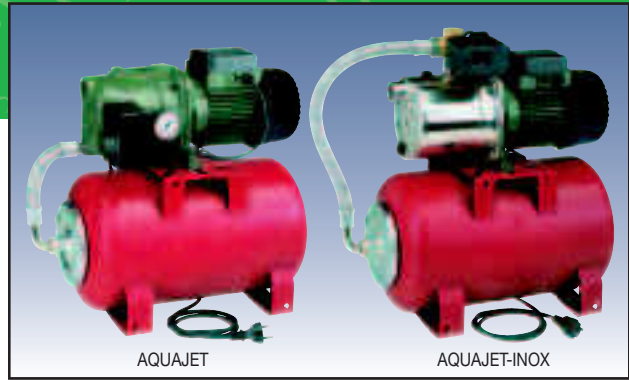

Operating range: up to 5.4 m³/h with head up to 61 metres

Liquid temperature range: from 0°C to +35°C for domestic use
from 0°C to +40°C for other use

Pumped liquid characteristics: clean, free from solids or abrasive substances, not viscous, not aggressive, not crystallised and chemically neutral.


Maximum ambient temperature: +40°C

Maximum working pressure: 8 bar (800 kPa)



Protection level: IP 44 (IP 55 terminal board protection).

Insulation class: F

TECHNICAL DATA

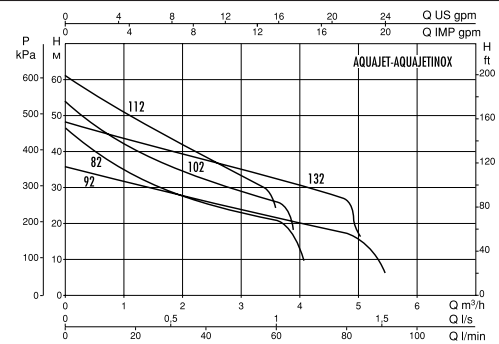

MODEL	ELECTRICAL DATA						HYDRAULIC DATA													
	VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		I _n A	CAPACITOR		Q												
			kW	HP		μF	V _c	m ³ /h	0	0,6	1,2	1,8	2,4	3,0	3,6	4,2	4,8			
l/min	0	10	20	30	40	50	60	70	80											
AQUAJET 82 M	1x220-240 V ~	0,85	0,6	0,8	3,8	12,5	450	H (m)	47	40	34	30	26,2	23,5	20,3					
AQUAJET 102 M	1x220-240 V ~	1,13	0,75	1	5,1	16	450		53,8	47	41	36,3	32,4	28,8	25,8					
AQUAJET 112 M	1x220-240 V ~	1,4	1	1,36	6,2	25	450		61	54	47,8	42,8	38,8	34,8	22					
AQUAJET 92 M	1x220-240 V ~	0,94	0,75	1	4,2	14	450		36,2	33,5	31	28,4	26	24	21,8	19,6	17,5			
AQUAJET 132 M	1x220-240 V ~	1,49	1	1,36	6,6	25	450		48,3	45,6	42,8	40	37,6	35	32,5	30	27,2			
AQUAJET-INOX 82 M	1x220-240 V ~	0,84	0,6	0,8	3,8	12,5	450	H (m)	47	40	34	30	26,2	23,5	20,3					
AQUAJET-INOX 102 M	1x220-240 V ~	1,13	0,75	1	5,1	16	450		53,8	47	41	36,3	32,4	28,8	25,8					
AQUAJET-INOX 112 M	1x220-240 V ~	1,4	1	1,36	6,2	25	450		61	54	47,8	42,8	38,8	34,8	20					
AQUAJET-INOX 92 M	1x220-240 V ~	0,94	0,75	1	4,2	14	450		36,2	33,5	31	28,4	26	24	21,8	19,6	17,5			
AQUAJET-INOX 132 M	1x220-240 V ~	1,45	1	1,36	6,6	25	450		4,3	45,6	42,8	40	37,6	35	32,5	30	27,2			

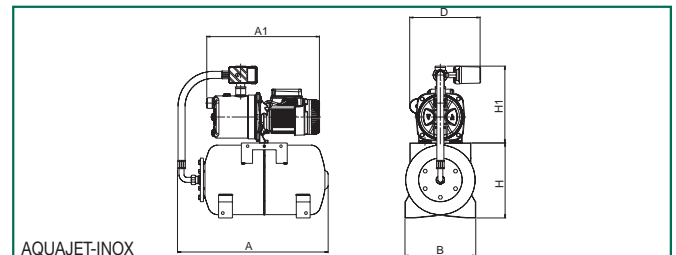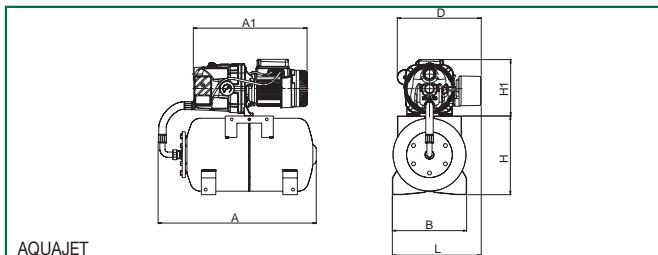

MODEL	A	A1	B	D	H	H1	L	PACKAGING DIMENSIONS			VOLUME m ³	WEIGHT Kg
								L/A	L/B	H		
AQUAJET 82 M	543	390	255	288	270	239	305	566	360	510	0,104	18,2
AQUAJET 102 M	543	409	255	293	270	239	305	566	360	510	0,104	20,0
AQUAJET 112 M	543	409	255	293	270	239	305	566	360	510	0,104	21,0
AQUAJET 92 M	543	390	255	288	270	239	305	566	360	510	0,104	19,2
AQUAJET 132 M	543	409	255	293	270	239	305	566	360	510	0,104	21,0
AQUAJET-INOX 82 M	543	406	255	-	270	276	-	566	360	590	0,102	15,3
AQUAJET-INOX 102 M	543	424	255	260	270	276	-	566	360	590	0,102	17,1
AQUAJET-INOX 112 M	543	424	255	260	270	276	-	566	360	590	0,102	18,1
AQUAJET-INOX 92 M	543	406	255	-	270	276	-	566	360	590	0,102	15,3
AQUAJET-INOX 132 M	543	424	255	260	270	276	-	566	360	590	0,102	18,1